

# VSP-03

## Visible Pen - Laser Diode


### Description:

The Visible Pen is used to check or identify singlemode and multimode optical fibers & components. The universal adapter is suitable for every 2.5 mm or 1.25 mm fiber optic connector. The small, compact and handy housing makes the device suitable for daily use.

### Specification:

<b>Wavelength</b>		630 - 680 nm
<b>Output power</b>	singlemode	$\geq 0.3$ mW
	multimode	$\geq 1.0$ mW
<b>Operation Mode</b>		CW, Pulse, ON/OFF
<b>Laser Class</b>		3A
<b>Dimensions</b>	length	$168 \pm 2$ mm
	diameter	13.5 mm
<b>Batteries</b>		Alkaline AAA, 2 pcs
<b>Suitable Fiberoptic Connectors</b>	VSP-03-250	E2000, FC, SC, ST, LSA, ... standard 2.5 mm ferrule
	VSP-03-125	LC, MU, LX5, ... SFF 1.25 mm ferrule

### Operating Instruction:

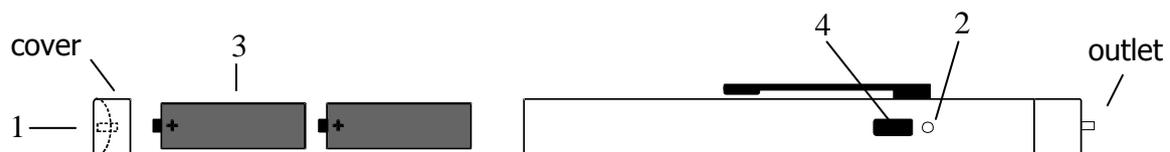

### Inserting the batteries:

Unscrew the cover and insert batteries (3) with the correct polarity. The correct polarity is shown in the drawing.

### Operation

The instrument can be switched on and off by pressing the button (1). By repeatedly pressing the button (4) the operator can select between a continuous light mode, flashing mode with approximately frequency 3 Hz and ON/OFF mode. Signalization LED (2) shows the selected mode.

Then the laser beam will emerge from the outlet.

### Ordering Code:



VSP-03-250



VSP-03-125



### Safety Notes:

Never look into the laser beam and do not point it at humans or animals. Laser radiation can cause damage to the eyes or skin.

Do not point the laser pointer at a mirror or other reflecting surfaces. The uncontrolledly deflected beam can hit humans or animals. The device and the batteries are not for children. They are not a toy.

The product is equipped with a class 3R laser product.